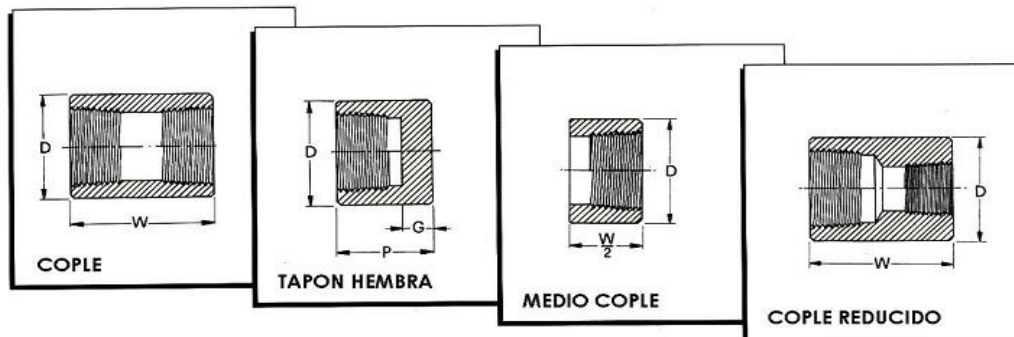


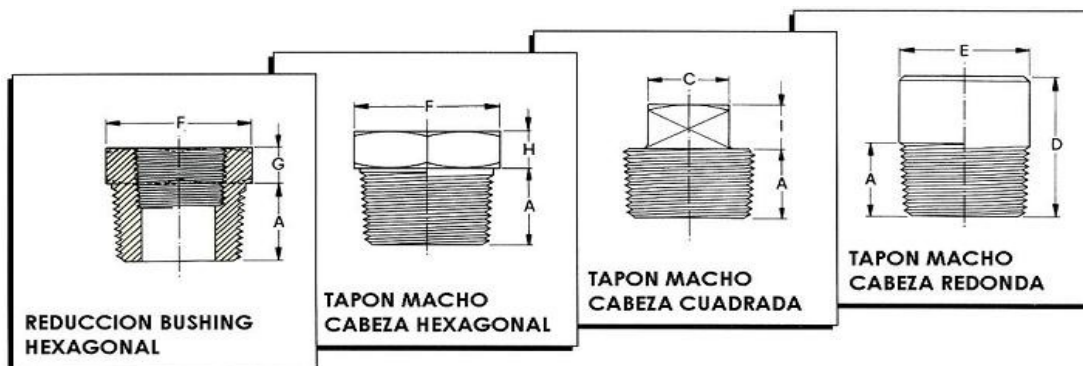


Tabla de Medidas Conexión Forjada Roscada (NPT)

VACONSA



		DIAMETRO NOMINAL											
CLASE	PULG	1/8	1/4	3/8	1/2	3/4	1	1 1-4	1 1-2	2	2 1-2	3	4
3000 LB	D	15.7	19.0	22.3	28.5	35.0	44.5	57.1	63.5	76.0	91.9	107.9	139.7
	W	31.7	35.0	38.1	47.7	50.8	60.4	66.5	79.2	85.8	91.9	107.9	120.6
	P	19.0	25.4	25.4	31.7	35.8	41.1	44.5	44.5	47.7	60.4	65.0	68.3
	G	4.8	4.8	4.8	6.3	6.3	9.6	9.6	11.2	12.7	15.7	19.0	22.3
6000 LB	D	22.3	25.4	31.7	38.1	44.5	57.1	63.5	76.2	91.9	107.9	127	158.7
	W	31.7	35.0	38.1	47.7	50.8	60.4	66.5	79.2	85.8	91.9	107.9	120.6
	P		26.9	26.9	33.3	38.1	42.9	46.0	47.7	50.8	63.5	68.3	74.7
	G		6.3	6.3	7.9	7.9	11.2	11.2	12.7	15.7	19.0	22.3	28.4



		DIAMETRO NOMINAL											
CLASE	PULG	1/8	1/4	3/8	1/2	3/4	1	1 1-4	1 1-2	2	2 1-2	3	4
3000 / 6000 LB	A	9.6	11.2	12.7	14.2	15.7	19.0	20.6	20.6	22.3	26.9	28.4	31.7
	C	7.1	9.6	11.2	14.2	15.7	20.6	23.9	28.4	33.3	38.1	42.9	63.5
	D	35.0	41.1	41.1	44.5	44.5	50.8	50.8	50.8	63.5	69.8	69.8	76.2
	E	10.4	13.5	17.5	21.3	26.9	33.3	42.9	48.5	60.5	73.1	88.9	114.3
	F	11.0	16.0	17.5	22.0	27.0	35.0	44.5	51.0	63.5	76.0	89.0	117.5
	G		3.0	4.1	4.8	5.6	6.3	7.1	7.8	8.6	9.6	10.4	12.7
	H	6.3	6.3	7.9	7.9	9.6	9.6	14.2	15.7	17.5	19.0	20.6	31.7
	I	6.3	6.3	7.9	9.6	11.2	12.7	14.2	15.7	17.5	19.0	20.6	25.4

Nota: todas las dimensiones son en milímetros y pueden variar dependiendo del fabricante.