





VACONSA

Tabla de Medidas Conexión Forjada Roscada (NPT)

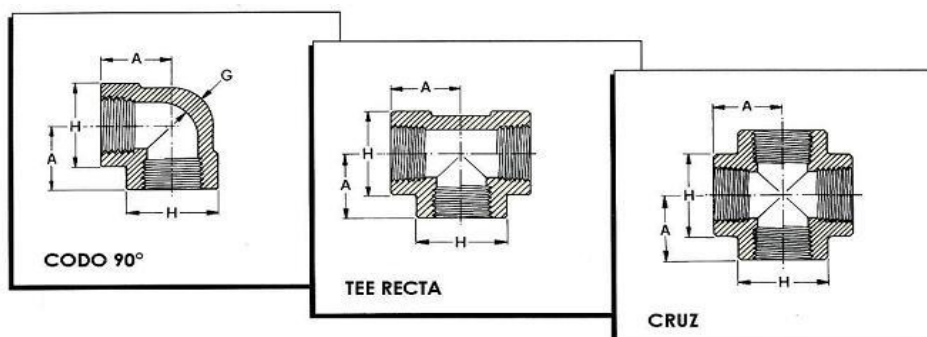

| CLASE | PULG | DIAMETRO NOMINAL | | | | | | | | | | | |
|---------|------|------------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| | | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1-4 | 1 1-2 | 2 | 2 1-2 | 3 | 4 |
| 3000 LB | A | 20.60 | 24.60 | 28.50 | 33.30 | 38.10 | 44.50 | 50.80 | 60.50 | 63.50 | 82.60 | 95.30 | 114.30 |
| | H | 22.40 | 25.40 | 33.30 | 38.10 | 46.00 | 55.60 | 62.00 | 75.40 | 84.10 | 101.60 | 120.60 | 152.40 |
| | G | 3.20 | 3.30 | 3.50 | 4.10 | 4.30 | 5.00 | 5.30 | 5.60 | 7.10 | 7.60 | 8.80 | 11.20 |
| 6000 LB | A | 24.60 | 28.50 | 33.30 | 38.10 | 44.50 | 50.80 | 60.50 | 76.20 | 82.60 | 95.30 | 106.40 | 114.30 |
| | H | 25.40 | 33.30 | 38.10 | 46.00 | 55.60 | 62.00 | 75.40 | 84.10 | 101.60 | 120.60 | 146.00 | 152.40 |
| | G | 6.40 | 6.60 | 7.00 | 8.20 | 8.50 | 9.90 | 10.60 | 11.10 | 12.10 | 15.30 | 16.60 | 18.70 |

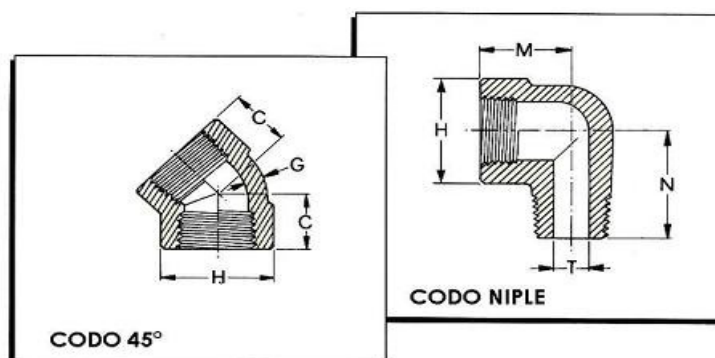

| CLASE | PULG | DIAMETRO NOMINAL | | | | | | | | | | | |
|---------|------|------------------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
| | | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1-4 | 1 1-2 | 2 | 2 1-2 | 3 | 4 |
| 3000 LB | C | 17.5 | 19.0 | 22.4 | 25.4 | 28.5 | 33.3 | 35.0 | 42.9 | 43.7 | 52.3 | 63.5 | 79.2 |
| | H | 22.4 | 25.4 | 33.3 | 38.1 | 46.0 | 55.6 | 62.0 | 75.4 | 84.1 | 101.6 | 120.6 | 152.4 |
| | G | 3.2 | 3.3 | 3.5 | 4.0 | 4.3 | 5.0 | 5.3 | 5.6 | 7.1 | 7.6 | 8.8 | 11.2 |
| | M | | 24.6 | 28.5 | 33.3 | 38.1 | 44.5 | 50.8 | 60.5 | 63.5 | | | |
| | N | | 26.7 | 32.0 | 35.3 | 40.9 | 50.0 | 61.0 | 69.8 | 82.5 | | | |
| | T | | 7.5 | 10.5 | 13.5 | 18.5 | 23.5 | 32.0 | 37.5 | 48.5 | | | |
| 6000 LB | C | 19.0 | 22.4 | 25.4 | 28.5 | 33.3 | 35.0 | 42.9 | 47.3 | 52.3 | 63.5 | 79.2 | 79.2 |
| | H | 25.4 | 33.3 | 38.1 | 46.0 | 55.6 | 62.0 | 75.4 | 84.1 | 101.6 | 120.6 | 146 | 152.4 |
| | G | 6.4 | 6.6 | 7.0 | 8.2 | 8.5 | 9.9 | 10.6 | 11.1 | 12.1 | 15.3 | 16.6 | 18.7 |
| | M | | 28.5 | 33.3 | 38.1 | 44.5 | 50.8 | 60.5 | 63.5 | | | | |
| | N | | 32.0 | 35.3 | 40.9 | 50.0 | 61.0 | 69.8 | 82.5 | | | | |
| | T | | 5.5 | 7.5 | 10.5 | 12.5 | 16.5 | 24.0 | 29.5 | | | | |

Nota: todas las dimensiones son en milímetros y pueden variar dependiendo del fabricante.